

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 728 457 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.01.1999 Bulletin 1999/03

(51) Int. Cl.⁶: **A61J 1/20**

(21) Application number: 95203662.2

(22) Date of filing: 28.12.1995

(54) Method and apparatus for providing a sterility seal in a medicinal storage bottle

Methode und Vorrichtung zur sterilen Abdichtung einer medizinischen Vorratsflasche

Méthode et appareil pour munir un flacon de stockage de médicament d'un joint stérile

(84) Designated Contracting States:
BE CH DE FR GB IT LI NL

(30) Priority: 25.01.1995 US 377885

(43) Date of publication of application:
28.08.1996 Bulletin 1996/35

(60) Divisional application:
98117884.1 / 0 884 041

(73) Proprietor:
Becton Dickinson France S.A.
F-38800 Le Pont-de-Claix (FR)

(72) Inventors:

- Solomon, Donald D.
Warwick, New York 10990 (US)
- Thibault, Jean-Claude
F-38120 Saint-Egrève (FR)

(74) Representative:

Bosotti, Luciano et al
c/o JACOBACCI & PERANI S.p.A.
Corso Regio Parco, 27
10152 Torino (IT)

(56) References cited:

FR-A- 2 522 971	FR-A- 2 683 209
US-A- 3 206 073	US-A- 3 542 913
US-A- 4 938 371	

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

I. Field of the Invention

The invention relates to a method and apparatus for providing sterility in a medicinal storage bottle, and more particularly, to a method and apparatus for creating a sterility seal in a medicinal bottle impervious to disruptions by tolerance difficulties or shipping treatment. A bottle according to the first part of claim 1 and a method according to the first part of claim 11 are known from US-A-3 206 073.

II. Background

In the medical arts, there are known certain medicinal storage bottles useful for storing, shipping and containing a medicine disposed in dry powder or tablet form that is intended to be reconstituted with a liquid substance for administration to a patient. Examples of such containers are found, *inter alia*, in U.S. Patent Nos. 3,033,202 to Richter et al.; 3,206,073 to Scislowicz; 4,211,333 to Villarejos; and 4,941,876, 5,358,501 and PCT Application WO 90/07319, all to Meyer or Meyer et al. Utilizing the Scislowicz patent as a reference and as depicted in Figures 1 and 2 of that patent, common to all the devices disclosed in the prior art there includes some type of container 10 containing a medicament 14 to be reconstituted. Access to a reconstituting fluid 37 held in a separate container 35 is provided by a transfer assembly 13. In the Scislowicz reference, the transfer assembly includes a sharpened cannula element, but in the case of the Meyer et al. U.S. '876 and PCT '319 references, the transfer assembly includes some type of Luer-Lock adapter suitable for connection directly with other bottles (for instance, PCT '319) or with a separate needle cannula element (US '876).

As the skilled artisan will appreciate, the sterility of the medicinal component 14 held in the container 10 is normally preserved by some type of sealing mechanism, isolating at least the medicament 14 from contamination with the outside environment. In a number of these assemblies, such as the Scislowicz '073 patent or the Meyer '501 patent, sealing isolation for the medicament is provided by incorporating as part of the transfer assembly some type of sealing mechanism slidably engageable with the neck of the bottle, itself incorporating a fluid conduit selectably in fluid communication with the interior of the bottle.

For example in Scislowicz '073 patent, the inner surface of the tubular portion 53 of a sheath or protective cap 50 is provided with a plurality of inwardly extending annular sealing rings or ridge elements 55, as shown in Fig. 8. The sealing rings 55 are provided to engage the outer surface of the tubular neck 12 of the bottle and to maintain the dispensing cannula of the transfer assembly in the sterile condition. The transfer assembly can thus be slid downwards towards the interior of bottle when lyophilization of the medicament is desired. However, during transport of the bottle, the sealing portion is retained in the neck, in an attempt to block the fluid conduit and cut off any environmental contact with the interior of the bottle through the transfer assembly.

In a similar vein, separate seal portions are often incorporated about the transfer assembly to further enhance the imperviousness of the aforementioned designs to extraneous contamination. For example, in the Meyer '501 patent, a toroidally-shaped sealing element 29 is incorporated which contacts the interior neck portion of the container 10 so as to form an aseptic barrier during storage, as well as to provide a sealed connection and an aseptic barrier during the activation phase of the container. As evident from the Scislowicz or Meyer references, the removable cap 40 is often fitted about the transfer assembly 13 in an effort to protect the transfer assembly from damage or contaminating contact pending use of the container. The cap, often configured to be retained with or against a portion of the container 10, can be covered with a tamper-evident seal (such as seen in Meyer '501) so as to give further indication if the sterility of the medicament 14 might have been somehow compromised.

Document FR-A-2522971 discloses a cannula device in which a protective cap is biased against an elastic sealing material applied to a cylindrical portion of a connector which support the needle of the cannula.

A somewhat similar arrangement is shown, e.g. in US-A-4 962 856, where the elastic sealing material is in the form of a silicone rubber gasket, while still other documents, such as US Reissue 33 886 or US-A-3 973 688 show alternative sealing liner or member arrangements.

While the foregoing approaches in general are directed to preserving the sterility of the medicament 14 held within the container, discrepancies in dimensions or manufacturing tolerances of the various components forming the medicinal storage bottles, the handling of the bottles during shipment by ground, sea or air, and related factors could affect the ability of the bottles to maintain sterility of the medicament 14 pending use. Tests for integrity include, *inter alia*, immersing the bottle in a fluid bath over a set period of time, with the fluid held at pressures simulating conditions to which the bottle will be exposed over time.

In particular, while for the most part serving to isolate the medicament itself from external contaminant effects, it has been found that contaminants of liquid, biological, or particulate nature may still be able to infiltrate the container through the cap element 40, thereby contaminating the transfer assembly 13. Difficulties associated with molding the

interface between cap and container with a perfectly precise fit make it virtually impossible to ensure sterility relying solely on the cap as a barrier. More specifically, dimensional variations are bound to occur from production batch to batch, so that a hermetic seal between matching components cannot be assured in every instance. In addition, molded parts sometimes display weld lines which, if disposed in an area necessitating perfect mating contact, can interfere with precise fit. Overall then, most molding techniques cannot be relied upon to produce seals of a hermetic nature. This, more often than not, is an unacceptable condition for a product relying on sterility prior to use.

The above-mentioned difficulties are further amplified by the treatment imposed on the bottles during shipment. For example, the bottles may be exposed to extreme atmospheric variations, inclusive of temperature extremes and, when shipment occurs by air, significant pressure disturbances. Such changes in pressure or temperature act upon the individual components and normally cause any hermetic seals effected by precision molding to be disrupted or broken, exposing the bottle and particularly the transfer assembly to contamination. Absent a proper seal impervious to atmospheric variations, shipment is oftentimes limited to road or rail transport, which is slower and sometimes costlier than shipment by air.

Moreover, owing to considerations of cost, manufacturing efficiencies, and ease of transport, it is common for relatively bulky items such as medicinal storage bottles to be shipped only in simple corrugated or cardboard containers, which provide little if any protection against exposure to outside contaminants. Blister packs or pouches, typically employed when an enclosed product is sterilized such as by gas treatment or irradiation, are normally excluded from bulky product such as medical storage bottles. Thus, there is usually the requirement for the bottle to rely solely on its own integral design and its components for maintaining the sterility of the product contained therein.

There is a need, therefore, for a way to ensure sterility in a medicinal storage bottle, relying on its integral componentry and design, which is particularly impervious to handling or shipment conditions to which the bottle is exposed, and which accounts for tolerance or dimensional variations in the components forming the bottle.

III. Summary of the Invention

These and other concerns are addressed by a method according to claim 11 and in a medicinal storage bottle in accordance with claim 1. A sterility seal, formed from a particulate, gaseous or aqueous impervious sealing material, is precisely located between the protective cap and the bottle in a manner so as to isolate the transfer assembly from outside contaminants.

In one embodiment, a band or layer configuration of a sealing material such as silicone is applied to a circumferential zone of the bottle that is subject to contact with the interior of the cap. Application may be effected, for instance, by a sponge or foam applicator disposed in rotating contact with the bottle. The interior of the cap is structured to include one or more ridge-type elements in an area coming into contact with the zone of silicone application. In one embodiment, the sealing material is applied to the bottle in a base area of the transfer assembly adjacent the container portion of the bottle, with the ridge elements formed for contact with the base area of the transfer assembly.

Upon insertion of the cap over the bottle, the ridge-type elements are urged into contact with the layer of silicone, causing the band of silicone to roll downwards along the surface of the transfer assembly so as to "bunch" into a toroidally-shaped O-ring type seal precisely conforming to the dimensions of the cap and storage bottle. The seal "caulks" any gaps or openings (collectively "microsurface defects") between the cap and the bottle created, for instance, by imprecise molding, handling treatment, or environmental variations, thereby hermetically isolating the transfer assembly from the outside environment so as to preserve the sterility of same. A reliable seal is thus created which is rupturable only by the user prior to administration of the medicament contained in the bottle. Owing to good surface tension as well as the resiliency properties of the sealing material, the seal created is able to withstand abuses rendered to the bottle by handling treatment as well as the stresses and strains imposed by environmental changes without rupture or separation from the cap or bottle, thereby better assuring the sterility of the bottle and the contents held therein.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail by way of reference to the following drawings, wherein:

Figure 1 is a cutaway view of a medicinal storage bottle in accordance with the present invention, illustrating the relationship between the bottle, the transfer assembly, the protective cap and the seal;

Figure 2 is a cutaway view of the transfer assembly of the medicinal storage bottle illustrating the band configuration of sealing material following application;

Figure 3 is a cutaway view illustrating the relationship between the protective cap and the transfer assembly following placement of the cap, together with the formation of a seal between the cap and the transfer assembly;

Figure 4 is a schematic overhead representation of one way to effect application of the sealing material to the bottle; and

Figure 5 is a schematic representation of one way to test the efficacy of a seal produced in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Turning now to the drawings, wherein like numerals denote like components, Figures 1 through 3 illustrate one embodiment of a medicinal storage bottle 10 in accordance with the present invention. The various components of the medicinal storage bottle can be formed or molded from conventional materials known to artisan in the medical arts, such as polypropylene, polycarbonate polyethylene, glass, or the like. The bottle 10 comprising a bottle body 10 typically includes a container portion 12 adapted to retain therein a substance such as dry powder medicaments or tablet form medicaments intended for reconstitution. A transfer assembly portion 14, adapted for fluid communication with the container portion 12, is normally provided so as to provide reconstituting fluid to the medicament held within the container portion 12 as well as deliver the reconstituted medicament to a patient.

As here illustrated, the transfer assembly 14 is generally formed in a cylindrical shape that defines an interior area 15 surrounding a piercing element 16 such as a sharpened needle cannula 16. The piercing element 16 is in fluid communication with the container 12 and serves to transmit fluid to and from the container 12. As will be understood by the skilled artisan, the transfer assembly 14 may take any variety of shapes or configurations as need or desire dictate (for instance, a square configuration), and the piercing element 16 need not be a sharpened needle cannula but can be, for instance, a blunt ended cannula, a luer-type fitting, or other types of fluid transfer devices as employed in the art.

Defining the interior 15 of the transfer assembly, there is a base portion 30 adjacent the container portion 12 of bottle 10, as well as a sidewall portion 30a that forms the substantial entirety of the transfer assembly 14. In one configuration, the sidewall portion 30a may have an overall length, for instance, of about 24.8 millimeters ("mm") and the base portion 30 can have an overall length of about 7.45 mm. As herein illustrated, the base portion 30 is slightly wider than sidewall portion 30a, for purposes to be herein explained. For instance, in one configuration the base portion 30 may display an outside width of about 17.1 mm while the sidewall portion 30a may display an outside width of about 16mm. However, it will be understood by the skilled artisan that the widths or lengths of the base and sidewall portions can be made identical, or of other differing dimensions, as need or desire dictate.

As illustrated in the figures, a protective cap 18 is provided to safeguard the bottle 10 both from damage as well as contamination pending use of the product. In its form as illustrated, the cap 18 primarily safeguards the transfer assembly 14 from damage as well as contamination with the environment, helping to maintain the sterility of the medicament contained within the container portion 12 until such time as the medicament is accessed for use, and is preferably dimensioned in accordance with the measurements provided the transfer assembly 14. The cap 18 may include a skirt portion 19 lengthened some distance beyond the base portion 30 of the transfer assembly 14 covering or otherwise engageable with the outside surface of the container portion 12 of the bottle; a closed end 23 for covering the exposed end of the transfer assembly 14; and a side wall 21 extending to the leading end 19a of the skirt 19 and about the circumference of the cap 18 that defines an enclosed interior portion 24 somewhat larger in diameter than the outside diameter of the sidewall portion 30a of the transfer assembly 14. Thus, cap 18 will encapsulate the transfer assembly 14 when placed over the bottle. If desired, a tamper evident seal such as a shrink-wrap seal (not shown) may be applied in contact with the skirt 19 and the container portion 12 subsequent to placement of the cap 18 on the bottle 10.

The cap may feature a contact portion 20 defined between the skirt 19 and the side wall 21, dimensioned to frictionally engage the base portion 30 of the transfer assembly 14 when the cap is placed over the bottle. Owing to the larger diameter of the base portion 30 vis à vis the sidewall portion 30a of the transfer assembly, the cap 18 may pass undisturbed over the sidewall portion 30a while frictionally engaging the base portion 30. It will be realized that the contact portion 20 may be formed as part of the side wall 21, thereby retaining the same dimensions, or it may be formed wider or larger than the side wall 21 so as to conform to the dimensions of, or portions of, the transfer assembly 14 with which it will engage.

To maximize the barrier properties of the cap, the overall cap 18 is normally preferably dimensioned to be as form fitting as possible with the bottle 10 and/or transfer assembly 14. In this regard, it will be seen that the portions of the cap 18, inclusive of the sidewall 21, skirt 19, and shoulders 25 are preferably molded or otherwise formed to be in as precise dimensional conformity with the bottle 10/ transfer assembly 14 as possible. However, as noted hereinabove, current plastic molding technology is of such a state that absolute precision molding of plastic parts to provide perfectly mated surfaces, such as to effect a hermetic seal, is virtually impossible, if not prohibitively cost restrictive in view of the commercial marketplace. Therefore, a need exists for a cost effective way to account for microsurface defects on the mating surfaces of the components so as to seal cap 18 with the bottle 10 against the effects of external contaminants, in a manner to address normal dimensional variations between components or tolerance difficulties therewith.

Thus, Figures 1 through 3 illustrate a sealing mechanism 50 provided in accordance with the present invention. Here, one or more ridge elements 22 are molded or otherwise formed in the cap 18 about the contact portion 20 for engagement against the base portion 30 of the transfer assembly 14. If desired, the ridge elements can be formed from

the same material as forms the cap 18, or they can be made from a different material as an integral component of the cap itself (for instance, via a co-injection process), or they may be separately formed and attached to the contact portion 20 via adhesives, mechanical affixation techniques or the like. As illustrated, the ridge elements 22 preferably are formed about the circumference of the contact portion 20 and may feature substantially rounded head portions 22a engageable with the base portion 30 of the transfer assembly 14. Slanted wall portions 22b are also provided which lead either into a following ridge element 22 or directly back to the body of the cap 18. As herein illustrated, there are three ridge elements 22, but it will be understood by the skilled artisan that any number of ridge elements may be provided, i.e., one or more, for the purposes herein described.

Prior to insertion of the cap 18 over the bottle 10, a band or layer configuration of sealing material 32 is applied to the bottle 10, in a region of base portion 30 of the transfer assembly 14 which is subject to engagement with contact portion 20 of the cap 18. As shown, the sealing material 32 is here disposed near the junction of the transfer assembly 14 and the container 12 and substantially cylindrically about the entire circumference of the transfer assembly 14, preferably to effect hermetic sealing of as much of the transfer assembly 14 as possible. Depending on the dimensions of the various components, the band or layer of sealing material 32 may display a width 32a, for instance, of about 3mm, and is applied in a depth of about 10 micrometers (μm).

One example of the sealing material 32 which may be employed with the invention is a silicone having a viscosity of $1,25 \times 10^{-2} \text{ m}^2/\text{s}$ (12500 centistokes), manufactured by the Dow Corning Corporation under product identification number DC360. It has been found that a silicone having the viscosity properties and the surface tension of this material provide a seal which is thick and strong enough to void fluid migration or seal disruption under handling stresses or environmental changes, but still fluid enough to effectively occupy the microsurface defects existent between the cap 18 and the bottle 10 so as to effectively address dimensional variations or tolerance difficulties on the mating surfaces of the components.

Numerous ways to effect application of the sealing material within the realm of the skilled artisan are possible. As depicted in Figure 4, one way is to apply the sealing material with an applicator device having foam-like or sponge-like pads 60, appropriately shaped and dimensioned for engagement with the surfaces of the bottle 10, such as the base portion 30 of transfer assembly 14 for distribution of the sealing material in a desired width. The pads 60 may display a soft, open cell configuration so as to be well suited to apply the sealing material. For instance, a polyurethane foam having a Shore hardness of about 60-80 may be employed.

The bottle 10 may be rotated against the pads 60 during application so as to uniformly, circumferentially distribute the sealing material 32 into the band configuration desired. The sealing material 32 can be provided from an external source 80 to the foam pads 60 with microdosing pumps 70 which, as the skilled artisan will realize, is a conventional way to ensure a precisely measured, constant, steady supply of material being applied so as to insure both uniformity of application as well as controlling the degree or quantity of application over a given time frame. Other ways to effect application of the sealing material might include, for instance, deposition processes, manual application, projecting the sealing material onto the bottle 10 in a manner similar to "ink jet" printers, or with other techniques known in the art.

Subsequent to the application of the sealing material 32 to the transfer assembly 14, cap 18 may be placed over the bottle 10 in a manner such that the contact portion 20 and, in particular, the head portions 22a of the raised elements 22, engage the surface of base portion 30. As the cap is urged downwards over the bottle, the raised elements 22 will engage the sealing material 32 to cause a "rolling" effect as the cap is urged downwards, thereby forming a toroidal-type O-ring seal 34 circumferentially disposed about the base portion 30 and engaging both the base portion 30 and the cap 18. The seal 34 thus created circumferentially conforms to the dimensions of the cap and base portion. The seal which is formed may take the shape of a toroid and serve to perfectly isolate the transfer assembly 14 from the outside environment. Owing to the configuration of the raised elements 22, excess sealing material 32 may "ooze" into the interspaces 35 defined between adjacent raised elements 22 and the base portion 30, enhancing the efficacy of the seal 34 created by the motion of the cap on the sealing material 32, together with providing back-up for the seal 34 so formed.

The seal so produced, thus, is flexible enough to accommodate pressure or temperature variations, together with handling stresses and strains, while effectively blocking gas, particulate or fluid contamination from the transfer assembly. However, by applying an appropriate force on cap 18 such as by twisting the seal may still be readily broken by a user so as to obtain access to the medicament in container portion 12.

The efficacy of a bottle produced in accordance with the present invention is illustrated in a comparison test of four alternative approaches ("Samples 1-4") against two embodiments of a bottle ("Sample 5" and "Sample 6") produced in accordance with the present invention. One test for measuring the efficacy of various bottles against bottle 10 produced in accordance with the present invention is schematically illustrated in Figure 5. Here, the bottle 10 is tested in a vacuum chamber 110 as known in the art and supported therein by a stand 120. A dye solution 102 containing approximately three percent (3%) methylen blue is injected via syringe 100 into space 104 defined between the skirt 19 and the container portion 12 of the bottle. The bottle 10 is placed upside down so that the dye solution 102 can migrate adjacent the seal 34. The migration of any dye 102 past the seal 34 towards the plurality of raised elements 22 will give an indi-

cation of how effective the seal 34 is at preventing contamination.

Subsequent to injection of the dye, the bottle is placed into the chamber 110 and the vacuum pump and regulator of the chamber 110 are regulated in order to achieve an absolute pressure of approximately 0.65 bar. The bottle 10 is held under this condition for approximately sixteen hours, at which point the chamber 110 is returned to atmospheric pressure. The bottle 10 is then removed from the chamber and observations are made, beginning at 30 minute intervals, to determine the migration of the dye 102 past the seal 34 and the three raised elements 22 so as to gauge the efficacy of the device.

Believing that the cap 18 could by itself perform two distinct functions - - retain itself onto the transfer assembly 14 with a force low enough so as not to impede a user's easy removal when desired, while also resealing the transfer assembly against contamination -- attempts were made to optimize the fit between the cap and the bottle by "tweaking" either of the cap mold or the bottle mold. "Sample 1" and "Sample 2" thus represent, respectively, samples of bottles produced prior to any attempt to correct tolerance difficulties or dimensional difficulties, Sample 1 being a bottle produced prior to stabilization of the bottle molds by the mold maker, and Sample 2 representing a bottle produced by a molder attempting to control molding cycles so as to obtain perfectly mated parts. "Sample 3" is an attempt to correct mating difficulties by optimizing the quality produced by the transfer assembly mold (i.e., by optimizing material flow to uniformly fill cavities, by increasing mold flow to speed the filling of cavities, etc.) in the belief that bottle leakage occurred due to an imperfect cylindrical shape in the transfer assembly. Finally, "Sample 4" illustrates an attempt to optimize the uniformity of the cap 18 and particularly the raised elements 22, by improving the cap mold alone.

The test as previously described thus measures the percent leakage visualized past the innermost raised element 22. As detailed in the chart hereinbelow, while the first four "samples" displayed as much as a 44% leakage rate over a period of eight hours, the bottles produced with the seal in accordance with the present invention displayed no leakage:

LEAKS AT THE INNERMOST RAISED ELEMENT (IN %) TIME OF PRESSURE EXPOSURE

	<u>30 MIN</u>	<u>1 HOUR</u>	<u>2 HOURS</u>	<u>4 HOURS</u>	<u>6 HOURS</u>	<u>8 HOURS</u>
Sample 1	0%			2%		
Sample 2	11%	29%	33%	39%		44%
Sample 3	3%		16%		31%	
Sample 4	8%	19%	27%	33%	42%	
Sample 5	0%	0%	0%	0%	0%	0%
Sample 6	0%	0%	0%	0%	0%	0%

Thus, it will be seen that the apparatus and method in accordance with the present invention results in a bottle suitable for long term transportation and storage of a medicament contained therein, preserving the sterility of same prior to use, while being highly able to withstand handling treatment and environmental variations during transit. The seal created displays good surface tension properties preventing inadvertent disruption, and is readily resilient so as to adapt to changing pressures, temperatures and forces exerted on the bottle during shipment, while still being easily manipulable by a user to enable easy access to the product when use is desired. The method and apparatus in accordance with the present invention serves to obviate molding defects inherent in large batch molding runs, while providing an economical and cost efficient alternative to ensuring sterility in bottles of this type in large volume.

The skilled artisan will also appreciate that alternatives to the silicone sealing arrangement are possible. For example, in lieu of forming the raised elements 22 from the same material as forms the cap 18, it may be possible to incorporate the raised elements 22 as rubberized or siliconized components, such as rings which are either co-injected together with the cap 18 or separately formed and thereafter affixed to the interior surface of the cap 18. As with the sealing material 32, the rubberized or siliconized rings would be able to conform to microsurface defects in the components so as to seal the bottle against outside contamination. In this manner, the raised elements 22 themselves would perform a sealing function. However, it will also be apparent that rubberized or siliconized elements 22 may be utilized together with the sealing material 32 to amplify the sealing function provided by the rings 22.

It will be appreciated that the invention is not limited to the specific embodiments shown.

Claims

1. A bottle having a sterility seal, comprising:

- a bottle body (10) defining a container portion (12) for retaining a substance and a transfer portion (14) communicating with said container portion (12) for fluid communication with said substance;
- a protective cap (18) removably affixed with said bottle body (10) and having a closed end portion (23) and an enclosed interior (24) placeable about the transfer portion (14) for safeguarding the bottle (10) against contamination with the environment, said bottle body (10) having an engagement area (30) subject to contact with said protective cap (18);
- one or more ridge elements (22) formed on the interior of the protective cap (18) for contact with the engagement area (30) of the bottle (10); characterized in that:
- a sealing material (32) is circumferentially applied along the engagement area (30) of the bottle body (10),
- said one or more ridge elements (22) engaging the sealing material (32) during contact with the engagement area (30) of the bottle (10) upon placement of the cap (18) over the bottle body (10) to shape the sealing material (32) into a circumferential protective seal (34) between and adapted to the dimension of said bottle (10) and said cap (18).

2. The bottle of Claim 1, wherein the sealing material (32) is applied to the transfer portion (14) of the bottle (10).

3. The bottle of Claim 1 or 2, wherein said sealing material (32) is applied in a band configuration.

4. The bottle of Claim 3, wherein said sealing material (32) is applied adjacent a base area (30) of the transfer portion (14).

5. The bottle of Claim 1, wherein said one or more ridge elements (22) are substantially circumferentially formed about the interior of the cap (18).

6. The bottle of Claim 4, wherein said one or more ridge elements (22) comprise one or more raised protrusions substantially circumferentially formed on a side wall (21) of the protective cap (18).

7. The bottle of Claim 1, wherein said sealing material (32) is a silicon material.

8. The bottle of Claim 7, wherein said silicon material comprises silicone having a viscosity of about $1,25 \cdot 10^{-2}$ m²/s (12500 centistokes).

9. The bottle of Claim 1, wherein said transfer portion (14) including a base area (30) adjacent the container portion (12) and said band configuration of sealing material (32) is applied in a band configuration and is located at the base area (30) of the transfer portion (14).

10. The bottle of Claim 9, wherein said protective seal (34) is formed between the cap (18) and the transfer portion (14) adjacent the base area (30) of the transfer portion (14).

11. A method of providing a sterile seal for a bottle (10) conforming to the dimensional variations of the components forming the bottle (10), comprising the steps of:

- providing a protective cap (18) subject to be removably affixed with said bottle body (10) for safeguarding the bottle (10) against contamination with the environment, said bottle body (10) having an engagement area (30) subject to contact with said protective cap (18);
- providing one or more ridges (22) on an interior portion (24) of the cap (18) in an area of the cap (18) subject to contact with the engagement area (30) of the bottle (10), characterized in that it comprises the steps of:
- applying a sealing material (32) in band configuration along the engagement zone (30) of the bottle (10);
- placing the cap (18) into sealing contact over the bottle body (10) such that one or more of the ridges (22) on the interior portion (24) of the cap (18) come into contact with the sealing material (32) to shape the sealing material (32) into a circumferential protective seal (34) between and adapted to the dimensions of the protective cap (18) and the bottle (10).

12. The method of Claim 11, wherein said step of applying a sealing material (32) in band configuration comprises the steps of:

- placing the bottle (10) into surface contact with a foam pad (60) supplying said sealing material (32); and
- rotating the bottle (10) against the foam pad (60) to uniformly circumferentially apply the sealing material (32) in said region (30) of the bottle (10).

13. The method of Claim 11, further comprising the step of microdosing said sealing material (32) from an external supply to said foam pad (60) to regulate the quantity of sealing material (32) applied by the pad (60).

14. The method of Claim 11, wherein said protective seal (34) has a substantially O-ring shape.

15. The bottle of Claim 1, wherein said protective seal (34) has a substantially O-ring shape.

Patentansprüche

1. Flasche mit steriler Abdichtung, die umfaßt:

- einen Flaschenkörper (10), der einen Behälterabschnitt (12) zur Aufnahme einer Substanz und einen Übertragungsabschnitt (14), der mit dem Behälterabschnitt (12) in Verbindung steht und Fluidverbindung mit der Substanz herstellt, aufweist;
 - eine Schutzkappe (18), die lösbar an dem Flaschenkörper (10) angebracht ist und einen geschlossenen Endabschnitt (23) sowie einen umschlossenen Innenraum (24) aufweist, der um den Übertragungsabschnitt (14) herum angebracht werden kann, um die Flasche (10) vor Verunreinigung durch die Umgebung zu schützen, wobei die Flasche (10) einen Eingriffsbereich (30) aufweist, der mit der Schutzkappe (18) in Kontakt kommt;
 - eines oder mehrere Wulstelemente (22), die im Innenraum der Schutzkappe (18) ausgebildet sind und mit dem Eingriffsbereich (30) der Flasche (10) in Kontakt kommen;
- dadurch gekennzeichnet, daß:
- ein Dichtungsmaterial (32) in Umfangsrichtung auf den Eingriffsbereich (30) des Flaschenkörpers (10) aufgetragen ist,
 - das eine oder die mehreren Wulstelemente (22) beim Kontakt mit dem Eingriffsbereich (30) der Flasche (10) nach dem Aufsetzen der Kappe (18) auf den Flaschenkörper (10) mit dem Dichtungsmaterial (32) in Kontakt kommen und das Dichtungsmaterial (32) zu einer Umfangsschutzdichtung (34) zwischen der Flasche (10) und der Kappe (18) formen, die der Abmessung derselben entspricht.

2. Flasche nach Anspruch 1, wobei das Dichtungsmaterial (32) auf den Übertragungsabschnitt (14) der Flasche (10) aufgetragen ist.

3. Flasche nach Anspruch 1 oder 2, wobei das Dichtungsmaterial (32) in einer Bandstruktur aufgetragen ist.

4. Flasche nach Anspruch 3, wobei das Dichtungsmaterial (32) an einen Basisbereich (30) des Übertragungsabschnitts (14) angrenzend aufgetragen ist.

5. Flasche nach Anspruch 1, wobei das eine oder die mehreren Wulstelemente (22) im wesentlichen in Umfangsrichtung um das Innere der Kappe (18) herum ausgebildet sind.

6. Flasche nach Anspruch 4, wobei das eine bzw. die mehreren Wulstelemente (22) einen oder mehrere erhabene Vorsprünge umfassen, die im wesentlichen in Umfangsrichtung an einer Seitenwand (21) der Schutzkappe (18) ausgebildet sind.

7. Flasche nach Anspruch 1, wobei das Dichtungsmaterial (32) ein Silikonmaterial ist.

8. Flasche nach Anspruch 7, wobei das Silikonmaterial Silikon mit einer Viskosität von ungefähr $1,25 \times 10^{-2} \text{ m}^2/\text{s}$ (12500 centistokes) umfaßt.

9. Flasche nach Anspruch 1, wobei der Übertragungsabschnitt (14) einen Basisbereich (30) an den Behälterabschnitt (12) angrenzend enthält und die Bandstruktur aus Dichtungsmaterial (32) in einer Bandstruktur aufgetragen ist und sich an dem Basisbereich (30) des Übertragungsabschnitts (14) befindet.

10. Flasche nach Anspruch 9, wobei die Schutzdichtung (34) zwischen der Kappe (18) und dem Übertragungsabschnitt (14) an den Basisbereich (30) des Übertragungsabschnitts (14) angrenzend ausgebildet ist.

11. Verfahren zum Schaffen einer sterilen Abdichtung für eine Flasche (10), die sich an die Maßabweichungen der Bauteile anpaßt, die die Flasche (10) bilden, das die folgenden Schritte umfaßt:

- Bereitstellen einer Schutzkappe (18), die lösbar an dem Flaschenkörper (10) befestigt wird, um die Flasche (10) vor Verunreinigung durch die Umgebung zu schützen, wobei die Flasche (10) einen Eingriffsbereich (30) aufweist, der in Kontakt mit der Schutzkappe (18) kommt;
- Herstellen von einer oder mehreren Wulsten (22) an einem Innenabschnitt (24) der Kappe (18) in einem Bereich der Kappe (18), der mit dem Eingriffsbereich (30) der Flasche (10) in Kontakt kommt, dadurch gekennzeichnet, daß es die folgenden Schritte umfaßt:
- Auftragen eines Dichtungsmaterials (32) in Bandstruktur an dem Eingriffsbereich (30) der Flasche (10); Aufsetzen der Kappe (18) in dichtendem Kontakt auf den Flaschenkörper (10), so daß eine oder mehrere der Wulste (22) am Innenabschnitt (24) der Kappe (18) mit dem Dichtungsmaterial (32) in Kontakt kommen, und das Dichtungsmaterial (32) zu einer Umfangsschutzdichtung (34) zwischen der Schutzkappe (18) und der Flasche (10) formen, die den Abmessungen derselben entspricht.

12. Verfahren nach Anspruch 11, wobei der Schritt des Auftragens eines Dichtungsmaterials (32) in Bandstruktur die folgenden Schritte umfaßt:

- Herstellen von Oberflächenkontakt der Flasche (10) mit einem Schaumstoffpolster (60), das das Dichtungsmaterial (32) zuführt; und
- Drehen der Flasche (10) an dem Schaumstoffpolster (60), um das Dichtungsmaterial (32) in dem Bereich (30) der Flasche (10) gleichmäßig in Umfangsrichtung aufzutragen.

13. Verfahren nach Anspruch 11, das des weiteren den Schritt des Mikrodosierens des Dichtungsmaterials (32) von einer äußeren Quelle zu dem Farbstoffpolster (60) umfaßt, um die Menge an Dichtungsmaterial (32) zu regulieren, die von dem Polster (60) aufgetragen wird.

14. Verfahren nach Anspruch 11, wobei die Schutzdichtung (34) im wesentlichen O-Ring-Form hat.

15. Flasche nach Anspruch 1, wobei die Schutzdichtung (34) im wesentlichen O-Ring-Form hat.

Revendications

1. Flacon ayant un joint étanche pour la stérilité, comportant :

- un corps de flacon (10) définissant une partie servant de récipient (12) pour contenir une substance et une partie de transfert (14) communiquant avec ladite partie servant de récipient (12) pour une communication de fluide avec ladite substance ;
- une coiffe de protection (18), fixée de façon amovible audit corps du flacon (10), ayant une partie extrême fermée (23), et un intérieur fermé (24) pouvant être placé autour de la partie de transfert (14) pour sauvegarder le flacon (10) contre une contamination par le milieu ambiant, ledit corps de flacon (10) présentant une zone d'engagement (30) susceptible de rentrer en contact avec la coiffe de protection (18) ;
- un ou plusieurs éléments à arêtes (22) formés sur l'intérieur de la coiffe de protection (18) pour être en contact avec la zone d'engagement (30) du flacon (10) ; caractérisé en ce que :
- une matière d'étanchéité (32) est appliquée de manière circonférentielle le long de la zone d'engagement (30) du corps de flacon (10) ;
- lesdits un ou plusieurs éléments à arêtes (22) coopèrent avec la matière d'étanchéité (32) pendant le contact avec la zone d'engagement (30) du flacon (10) lors de la mise en place de la coiffe (18) sur le corps de flacon (10) pour mettre en forme la matière d'étanchéité (32) en un joint étanche circulaire de protection (34) formé entre ledit flacon (10) et ladite coiffe (18), et adapté aux dimensions de ces derniers.

2. Flacon selon la revendication 1, dans lequel la matière d'étanchéité (32) est appliquée à la partie de transfert (14) du flacon (10).

3. Flacon selon l'une des revendications 1 et 2, dans lequel ladite matière d'étanchéité (32) est appliquée selon une configuration en bande.
- 5 4. Flacon selon la revendication 3, dans lequel ladite matière d'étanchéité (32) est appliquée à proximité immédiate d'une zone de base (30) de la partie de transfert (14).
5. Flacon selon la revendication 1, dans lequel ledit ou lesdits éléments à arêtes (22) sont formés de façon sensiblement circonférentielle autour de l'intérieur de la coiffe (18).
- 10 6. Flacon selon la revendication 4, dans lequel ledit ou lesdits éléments à arêtes (22) comprennent une ou plusieurs saillies en relief formées de façon sensiblement circonférentielle sur une paroi latérale (21) de la coiffe de protection (18).
7. Flacon selon la revendication 1, dans lequel ladite matière d'étanchéité (32) est une matière siliconnée.
- 15 8. Flacon selon la revendication 7, dans lequel ladite matière siliconnée comprend une silicone ayant une viscosité d'environ $1,25 \cdot 10^{-2} \text{ m}^2/\text{s}$ (12.500 centistokes).
- 20 9. Flacon selon la revendication 1, dans lequel ladite partie de transfert (14) comprend une zone de base (30) adjacente à la partie servant de récipient (12), et dans lequel ladite configuration en bande de la matière d'étanchéité (32) est appliquée selon une configuration en bande et est placée au niveau de la zone de base (30) de la partie de transfert (14).
- 25 10. Flacon selon la revendication 9, dans lequel ledit joint étanche de protection (34) est formé entre la coiffe (18) et la partie de transfert (14) à proximité immédiate de la zone de base (30) de la partie de transfert (14).
11. Procédé de réalisation d'un joint étanche stérile pour un flacon (10) se conformant aux variations dimensionnelles des constituants formant le flacon (10), comprenant les étapes dans lesquelles :
 - 30 • on munit le flacon d'une coiffe de protection (18) susceptible d'être fixée de manière amovible sur le corps du flacon (10) pour sauvegarder ce flacon (10) contre une contamination par le milieu ambiant, ledit corps de flacon (10) ayant une zone d'engagement (30) susceptible de rentrer en contact avec ladite coiffe de protection (18) ;
 - 35 • on prévoit une ou plusieurs arêtes (22) sur une partie intérieure (24) de la coiffe (18) dans une zone de la coiffe (18) soumise à un contact avec la zone d'engagement (30) du flacon (10) ;
caractérisé en ce qu'il comprend les étapes suivantes :
 - on applique une matière d'étanchéité (32) selon une configuration en bande le long de la zone d'engagement (30) du flacon (10) ;
 - 40 - on place la coiffe (18) selon un contact étanche sur le corps de flacon (10) afin qu'une ou plusieurs des arêtes (22) se trouvant sur la partie intérieure (24) de la coiffe (18) viennent en contact avec la matière d'étanchéité (32) pour mettre en forme la matière d'étanchéité (32) en un joint circulaire étanche (34) entre la coiffe de protection (18) et le flacon (10), et adapté aux dimensions de ces derniers.
- 45 12. Procédé selon la revendication 11, dans lequel ladite étape d'application de la matière d'étanchéité (32) selon une configuration en bande, comprend les étapes dans lesquelles :
 - on place le flacon (10) en contact de surface avec un tampon de mousse (60) fournissant ladite matière d'étanchéité (32) ; et
 - 50 - on fait tourner le flacon (10) contre le tampon de mousse (60) pour appliquer circonférentiellement et uniformément la matière d'étanchéité (32) dans ladite région (30) du flacon (10).
13. Procédé selon la revendication 11, comprenant en outre l'étape d'un microdosage de ladite matière d'étanchéité (32) à partir d'une alimentation extérieure jusqu'au dit tampon de mousse (60) pour régler la quantité de matière d'étanchéité (32) appliquée par le tampon (60).
- 55 14. Procédé selon la revendication 11, dans lequel ledit joint étanche de protection (34) présente une forme substantiellement annulaire en O.

15. Flacon selon la revendication 1, dans lequel ledit joint étanche de protection (34) présente une forme substantiellement annulaire en O.

5

10

15

20

25

30

35


40

45

50

55

FIG-1

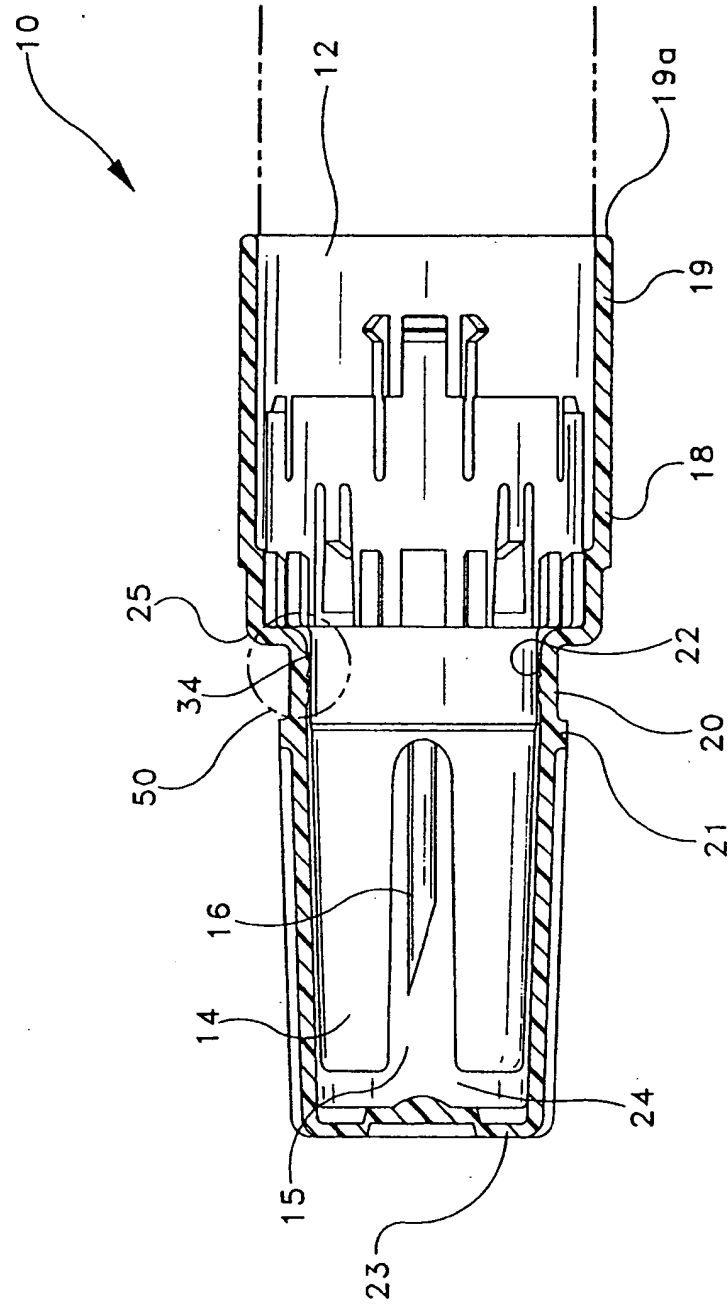

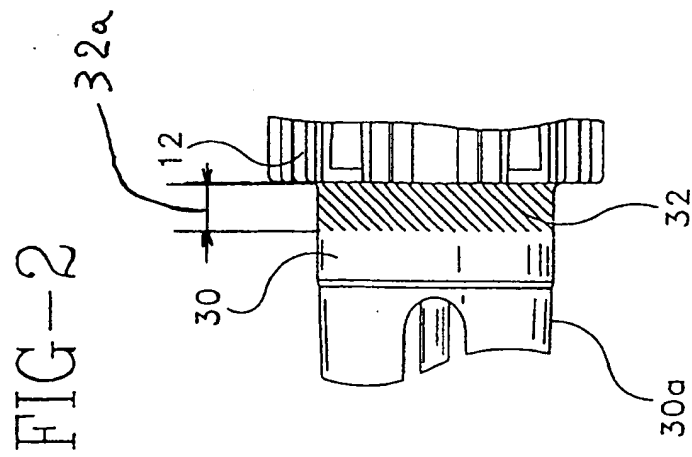


FIG-3

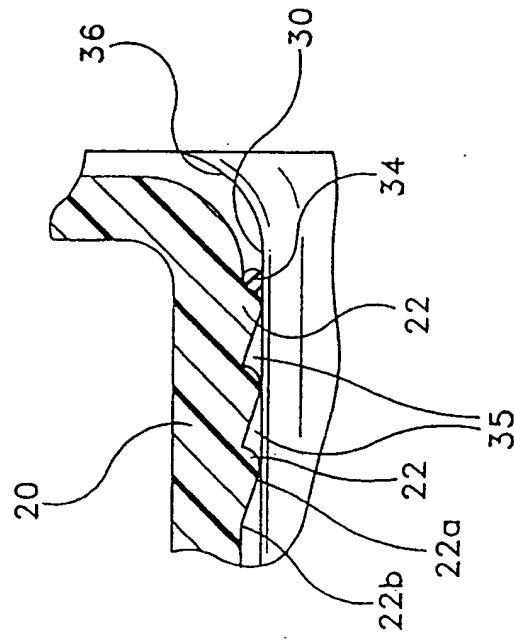


FIG-4


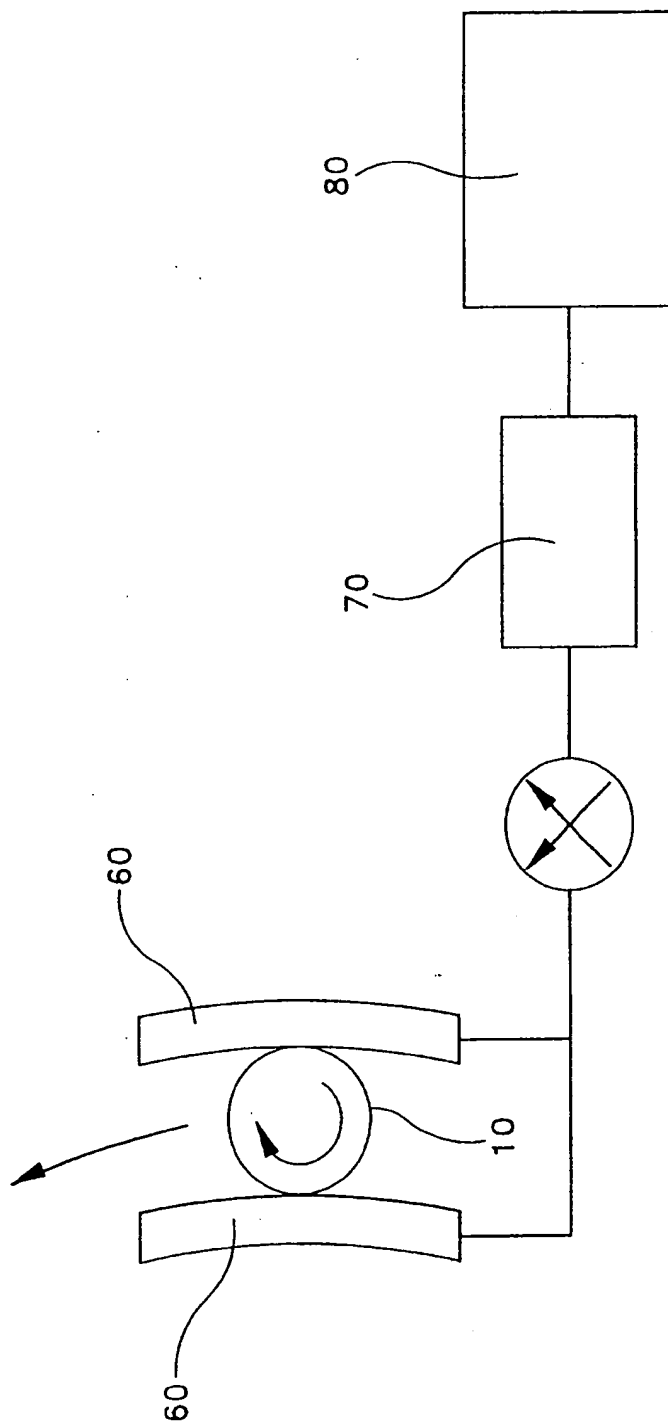


FIG-5





Europäisches Patentamt
European Patent Office
Office européen des brevets

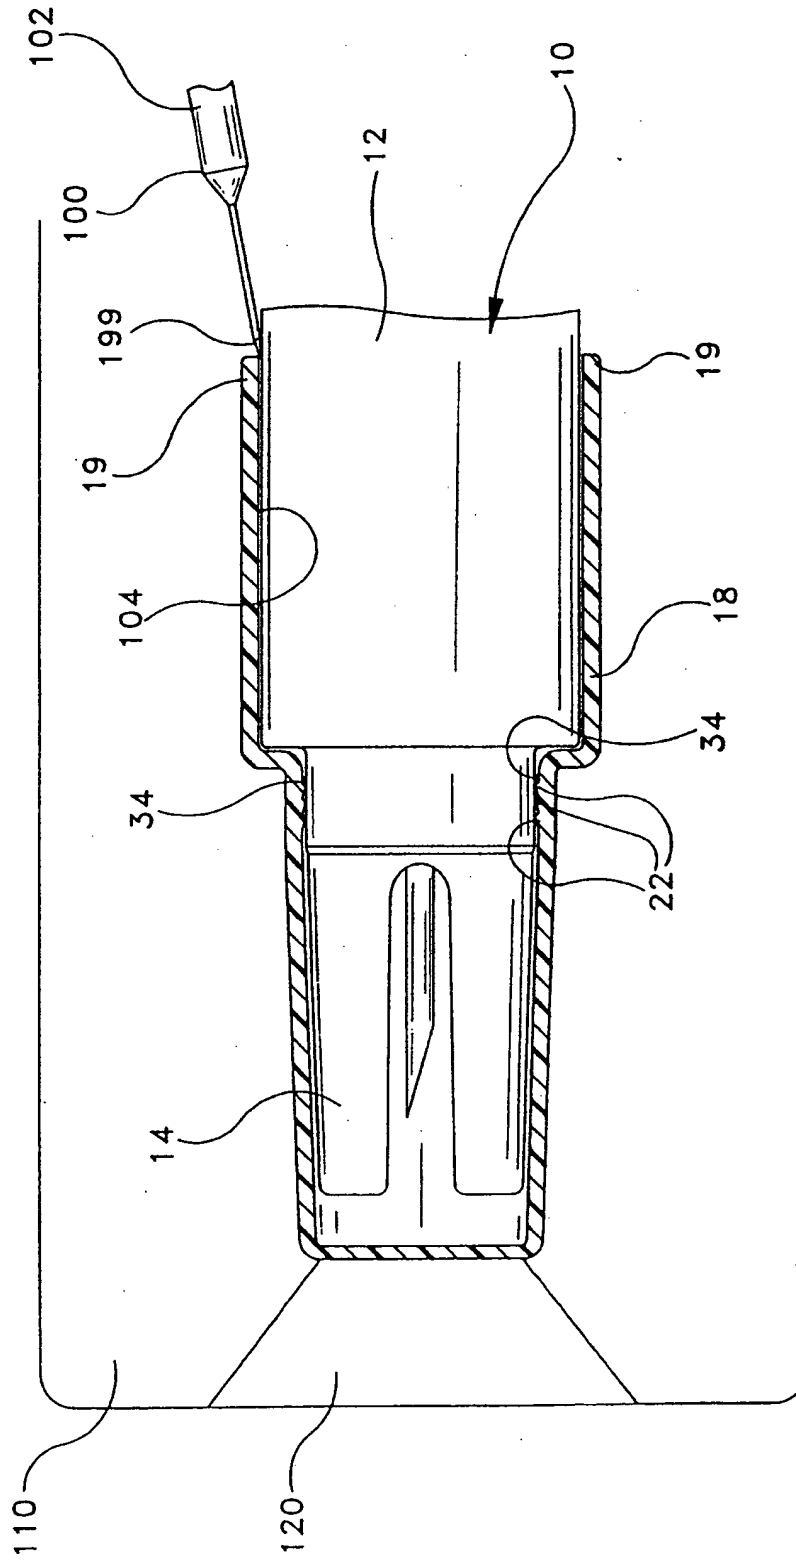

(11) **EP 0 728 457 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
20.11.1996 Bulletin 1996/47

(51) Int. Cl.⁶: **A61J 1/20**

(43) Date of publication A2:
28.08.1996 Bulletin 1996/35

(21) Application number: 95203662.2

(22) Date of filing: 28.12.1995

(84) Designated Contracting States:
BE CH DE FR GB IT LI NL

(30) Priority: 25.01.1995 US 377885

(71) Applicant: Becton Dickinson and Company
Franklin Lakes, New Jersey 07417-1880 (US)

(72) Inventors:

- Solomon, Donald D.
Warwick, New York 10990 (US)
- Thibault, Jean-Claude
F-38120 Saint-Egrève (FR)


(74) Representative: Perani, Aurelio et al
c/o JACOBACCI & PERANI S.p.A
Via Visconti di Modrone, 7
20122 Milano (IT)

(54) Method and apparatus for providing a sterility seal in a medicinal storage bottle

(57) A bottle having a sterility seal and a method for producing same are disclosed. The bottle, which can be configured to retain a medicament in powder or tablet form, features a protective cap configured to engage a transfer assembly associated with the bottle. The cap includes one or more raised ridges on an interior surface engageable with a portion of the transfer assembly. A band or layer configuration of a sealing material such as silicone is applied to the transfer assembly prior to insertion of the cap thereover. As the cap comes into surface contact with the sealing material, the ridges

cause the material to "roll up" into a toroidal O-ring configuration, thereby forming a seal between the cap and the bottle adapted to the dimensional variations of those components. The seal, which is resilient, is able to withstand harsh handling treatment and pressure or temperature variations without separation from the cap or bottle, thereby providing a hermetic seal isolating the transfer assembly and, hence, the medicament from the outside environment.

FIG-1

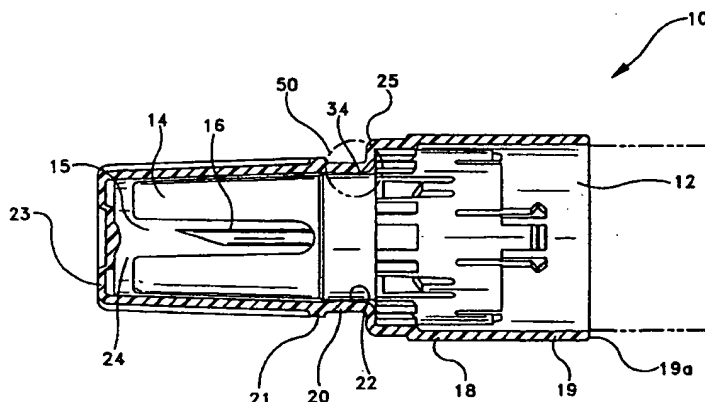

EP 0 728 457 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 20 3662

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y,D	US-A-3 206 073 (SCISLOWICZ) * column 4, line 29 - line 35; figures *	1-7,9-13	A61J1/20
Y	FR-A-2 522 971 (TERUMO KK) * page 5, line 30 - page 6, line 21 * * page 8, line 14 - line 26; figures 3A,3B *	1-7,9,10	
Y	FR-A-2 683 209 (POITEVIN) * page 2, line 20 - line 26; figures *	11-13	
A	US-A-3 542 913 (ROBINSON ET AL.) * the whole document *	1	
A	US-A-4 938 371 (VERCILLO)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A61J B65D A61M F16J
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 October 1996	Examiner Godot, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1500 01.92 (P0400)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.